

Wall Washer Flexible OP-LSWL-210

Tira de LED flexible alta calidad con 42 led/m y una potencia de 18W/M. Incorpora lentes de 20°, 30°, 45°, 60° o asimétrica de 20°x45°, ideales para iluminar cualquier pared de forma homogénea. Para cualquier tipo y solución de iluminación. Accesorios de instalación opcional.



18W/m



IP67



24 VDC



7 LED




	COLOR	TEMP.	POTENCIA	FLUX	VOLTAJE	DIMEN.	IP
OP-LSWL-210-24V-xx	Blanco	2700K/3000K/ 3500K/4000K/ 5000K/6500K	18W/M	2160lm/W	24V	23x11mm	67


■ Características técnicas

Potencia	18W/m
IP	67
Voltaje	24V
Nº de LEDs	42/m
Ángulo	20°/30°/45°/60° - Asimétrica 20°x45°
Garantía	5 años (int.)/3 años (ext.)
Longitud	5m

Medidas

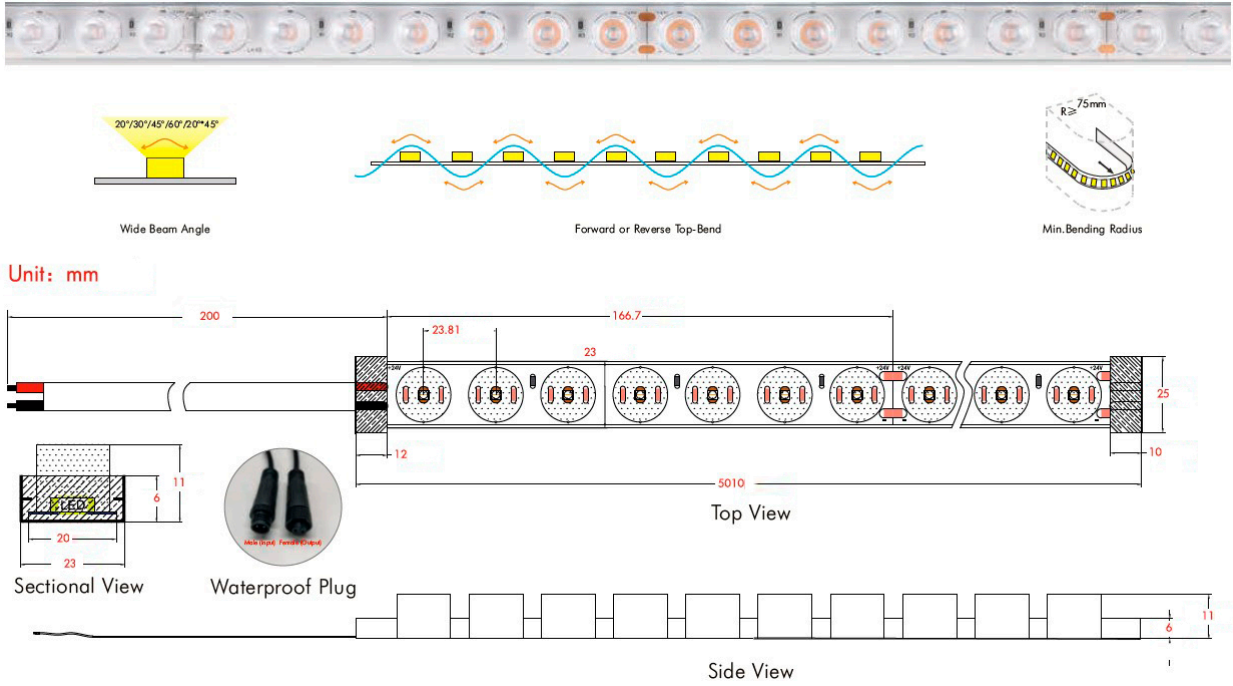

Aplicaciones

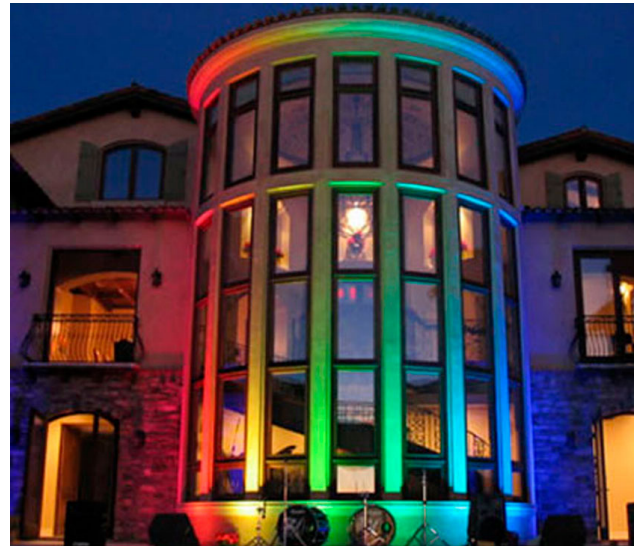


Instalación


Montaje en superficie o empotrar mediante cinta adhesiva, clip, abrazadera, canal de aluminio, soporte giratorio.



(1) Adhesive Tape

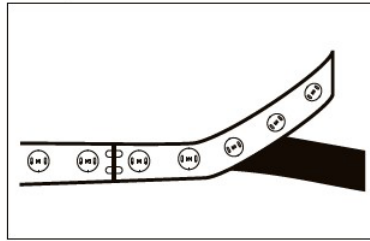


(1) Peel off the release paper of 3M tape.

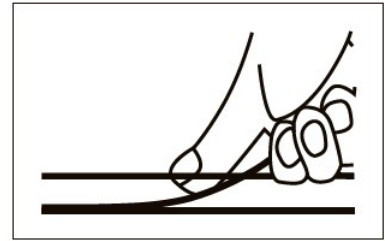


(2) Stick and fix the LED strip to the mounting surface.




(2) Plastic Clip & Screw

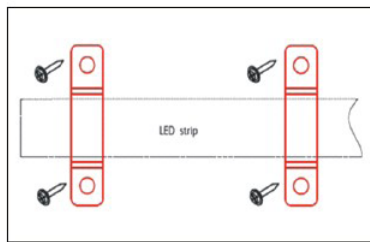


(1) Press the clip against the LED strip.

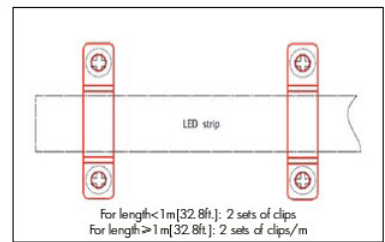


(2) Lock the clip with the screw.

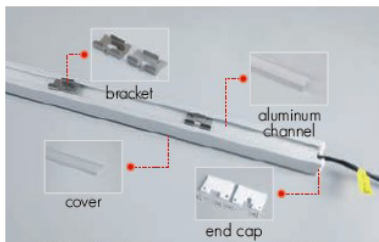

(3) Bracket & Aluminum Channel & Screw
Or
(4) Bracket & Aluminum Channel & Screw & PC Transparent Cover & End Cap

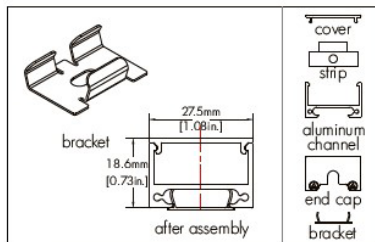


(1) Fix the bracket to the mounting surface by screw. (2) Fix the strip to the aluminum channel by adhesive tape. (3) Fix the cover and the end caps to the aluminum channel by screw. (4) Clip the aluminum to the bracket.

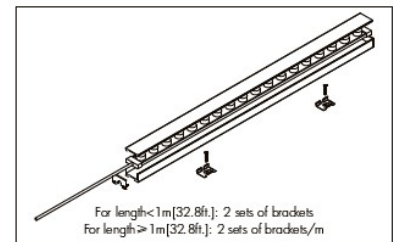


For length < 1m [32.8ft.]: 2 sets of brackets
For length > 1m [32.8ft.]: 2 sets of brackets/m




(5) 60° Rotatable Bracket & Aluminum Channel & PC Transparent Cover & End Cap & Screw

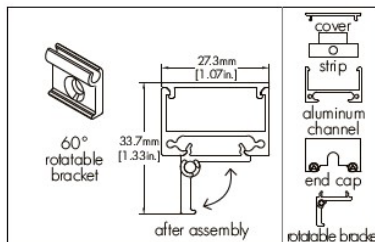


(1) Fix the bracket to the mounting surface by screw. (2) Fix the strip to the aluminum channel by adhesive tape. (3) Fix the cover and the end caps to the aluminum channel by screw. (4) Clip the aluminum to the 60° rotatable bracket.

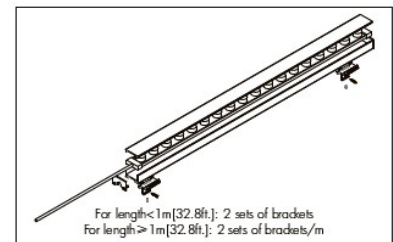


For length < 1m [32.8ft.]: 2 sets of brackets
For length > 1m [32.8ft.]: 2 sets of brackets/m

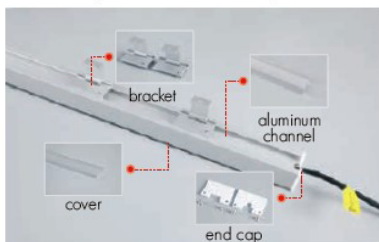

(6) 150° Rotatable Bracket & Aluminum Channel & PC Transparent Cover & End Cap & Screw

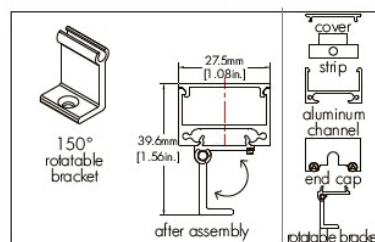

(1) Fix the bracket to the mounting surface by screw. (2) Fix the strip to the aluminum channel by adhesive tape. (3) Fix the cover and the end caps to the aluminum channel by screw. (4) Clip the aluminum to the 150° rotatable bracket.

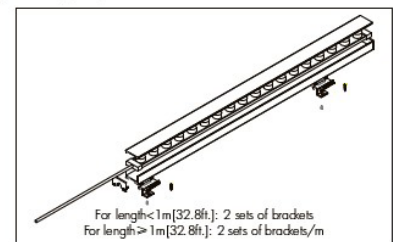

For length < 1m [32.8ft.]: 2 sets of brackets
For length > 1m [32.8ft.]: 2 sets of brackets/m

■ Advertencias

- Instale una fuente de alimentación adecuada con una potencia un 20% superior a la máxima potencia de la luminaria, para garantizar un correcto funcionamiento del dispositivo. Antes de encender, asegúrese de que el cableado esté instalado correctamente.
- Evite cambiar el circuito u otro componente de la luminaria.
- Evite raspar, torcer y doblar irregularmente durante la instalación, ya que podría romper la luminaria.
- El diámetro de plegado mínimo para es 75 mm, diámetros inferiores romperá la luminaria.
- El grado máximo de torsión es de 360° por 1m de longitud.
- Para proteger sus ojos, no mire la luminaria durante mucho tiempo mientras está iluminada.
- Solo personal cualificado puede instalar, desmontar y reparar.